Inkjet

2/17/2016

The information below reflects the standards for this equipment. Please contact department manager for questions on projects that may fall outside of the standard. If you are unsure about any of the information, please check with manager or estimating

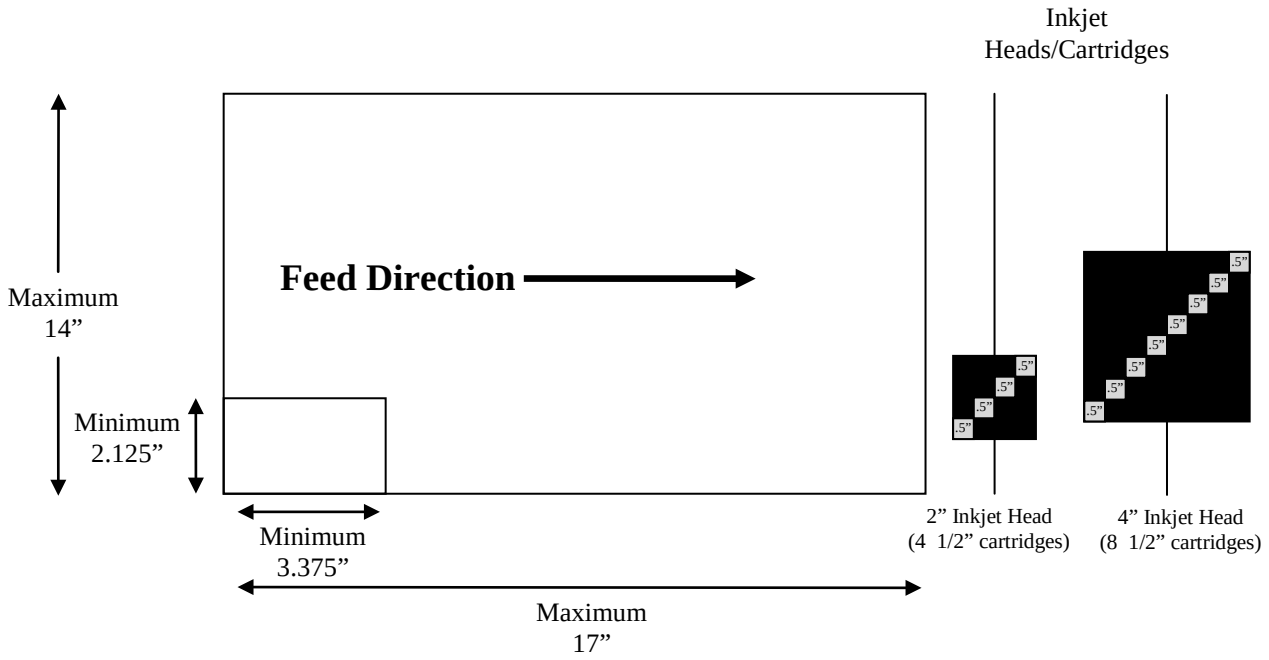

Max Sheet Size	14 x 17
Min Sheet Size	3.5 x 5 – with Standard Make-Ready Time
	2.125 x 3.375 – with Additional 2 hrs Make-Ready
<u>Stock Requirements:</u>	<u>Caliper</u>
Minimum	.007
Maximum	.625
	Note – PVC (Rigid Vinyl) Approved for Inkjet
<u>Inkjet Heads:</u>	One 2” Head (4 - .5” cartridges)
	One 4” Head (8 - .5” cartridges)

Label Stock: Can NOT be pre-guillotine trimmed – Would need to be Die Cut to size for feeding (inkjet feeds from bottom and labels will stick to each other if guillotined).

Aqueous Coating: OK to inkjet over Gloss, Satin or Soft Touch Aqueous coating.

UV Coating: Can NOT inkjet on top of UV.
We can inkjet a piece that is UV coated if a knock-out is made for inkjet area
Note – HP Solvent over UV Coating is subject to testing – requires special order for UV
See Mailing Operations Manager for details

Die Cut Pieces: MUST be approved by Mailing Operations Manager

In Line SeCap: Tab, Stamp, Label, “Post It Note” – see SeCap Blue Sheet for details

Document owner to approve spec sheet. After approval, deliver to Estimating Manager for final review. Approval by document owner and Estimating Manager is needed for update of controlled form.