

Flow Master Inserter

3-1- 2016


The information below reflects the standards for this equipment. Please contact department manager for questions on projects that may fall outside of the standard. If you are unsure about any of the information, please check with manager or estimating.

6 pockets + Inline Inkjetting - Inserter

Pockets: 5 pockets

Envelope Size: Min 3.75 x 6.75 Open Side
Max 10x13 Open Side

Envelope Flap: Min 1"
Max 2.5"
Flap must be machine insertable.
* See drawing →

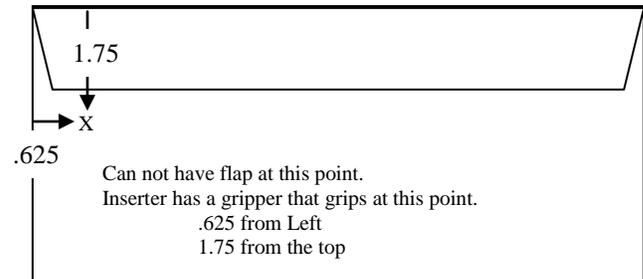

#10 Envelope
Max 3 sheets on 60# uncoated text

6 x 9 Envelope
Max 5 sheets 60# uncoated text
½ Fold only

*** Sheets must be pre-collated in order to nest fold

Stamping Yes

Inkjetting: Yes (2) 2" heads – (4) ½" cartridges per each 2" head

Camera Match: Yes (2D barcode required) - 3 cameras

(3) Cameras on insert track reads 2D. Reads from the top.

Max Read/Write size OSE is 10x13

Inserts: Can NOT insert multi-sheet side stitched pieces, Saddle stitched is OK

SIZE:

Min Insert Size 3.5 x 6

Max Insert Size 8.5 x 11

Minimum of .5" smaller than width of envelope. May need more if you have multiple inserts.

Minimum of .25" smaller than the height of the envelope.

Min thickness .0042

Max Thickness .25

Insert order: Starting from the front of the envelope:

** The envelope is face down when inserts go into envelope.

** Note if the window is on the back of the envelope the last piece that is inserted is what will show through the window.

Document owner to approve spec sheet. After approval, deliver to Estimating Manager for final review. Approval by document owner and Estimating Manager is needed for update of controlled form.